


16 MM PVC LIGHT F 320N / R50

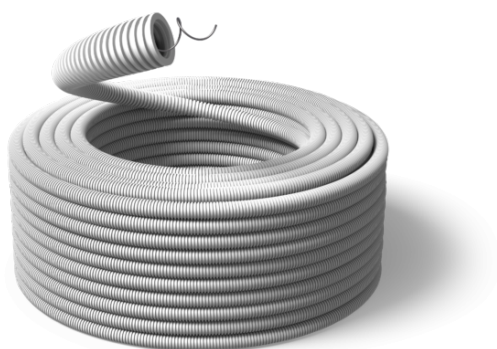

Light class. Made in PVC. Colour: grey (RAL 7035). With wire.

Art. code:	IPS16F
xSpeed PVC LIGHT	16 mm
Classification	22212
Conduit colour	Grey - RAL 7035
External diameter	16 mm
Internal diameter	10,7 mm
Coil	50 m
Pallet	7650 m

Technical information

Applications

Outdoor	No
Indoor	Yes
Exposed Installation	No
Liquid screed and concrete	No
Chased wall - Plasterboard	Yes*
Chased floor	No
False ceiling - Movable wall	Yes*
Prefab - Wood panels	Yes*

*Only for electrical installations that do not require HF/LSFOH conducts **
systems

Conduit technical specification

Material	PVC
Compression resistance	320N (23°C, +/-2°C) - Light
Resistance to impact	1J - Light
Min. operating temperature	-5°C
Max. operating temperature	+60°C
Bending resistance	Pliable
Insulation resistance	>100MΩ
Glow Wire Test (IEC EN 60695-2)	960°C
Certifications	  
Standard	EN 61386.1, EN 61386.22, IK: EN 62262

Conduit properties

Fire resistance: non-flame propagating	EN 61386.1, EN 61386.22
--	-------------------------

Conduit properties

According to Low Voltage Directive LVD 2014/35/EU

Packed with 100% recyclable PE
film



