


## 20 MM PVC ICE -25 750N / R50

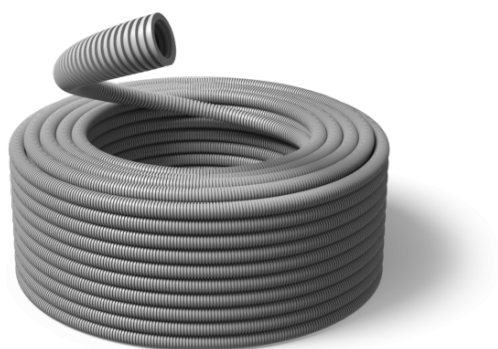

Very high resistance at low temperatures: -25°C. Made in PVC. Colour: grey (RAL 7037).

---

<b>Art. code:</b>	ICE20
<b>Classification</b>	33412
<b>Conduit colour</b>	Grey - RAL 7037
<b>External diameter</b>	20 mm
<b>Internal diameter</b>	14,1 mm
<b>Coil</b>	50 m
<b>Pallet</b>	4200 m

## Technical information

---

### Environmental certificate

Environmental Product Declaration 

---


### Applications

Outdoor	No
Indoor	Yes
Exposed Installation	No*
Liquid screed and concrete	Yes**
Chased wall - Plasterboard	Yes**
Chased floor	Yes**
False ceiling - Movable wall	Yes**
Prefab - Wood panels	Yes**
<i>Check local regulations</i>	*

*Only for electrical installations that do not require HF/LSFOH conducts systems* \*\*

---

### Conduit technical specification

Material	PVC
Compression resistance	750N (23°C, +/- 2°C) - Medium - (3)
Resistance to impact	2J (IK08) - Medium - (3)
Min. operating temperature	-25°C - (4)
Max. operating temperature	+60°C - (1)
Bending resistance	Pliable - (2)
Insulation resistance	>100MΩ
Glow Wire Test (IEC EN 60695-2)	960°C (IMQ)
Certifications	
Standard	EN 61386.1, EN 61386.22, IK: EN 62262

**Conduit properties**

Fire resistance: non-flame propagating	EN 61386.1, EN 61386.22
Compliant with Low Voltage Directive	LVD 2014/35/EU
Pre-lubricated	✓
Packed with 100% recyclable PE film	✓

