


20 MM PVC ICE -25 F 750N / R50

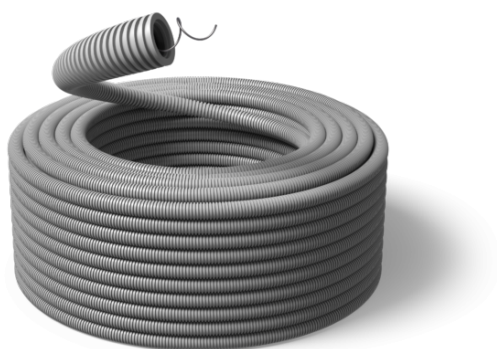

Very high resistance at low temperatures: -25°C. Made in PVC. Colour: grey (RAL 7037).
With wire.

Art. code:	ICE20F
Classification	33412
Conduit colour	Grey - RAL 7037
External diameter	20 mm
Internal diameter	14,1 mm
Coil	50 m
Pallet	4200 m

Technical information

Environmental certificate

Environmental Product Declaration 

Applications

Outdoor	No
Indoor	Yes
Exposed Installation	No*
Liquid screed and concrete	Yes**
Chased wall - Plasterboard	Yes**
Chased floor	Yes**
False ceiling - Movable wall	Yes**
Prefab - Wood panels	Yes**
-	<i>*Check local regulations</i>
-	<i>**Only for electrical installations that do not require HF/LSFOH conducts systems</i>

Conduit technical specification

Material	PVC
Compression resistance	750N (23°C, +/- 2°C) - Medium - (3)
Resistance to impact	2J (IK08) - Medium - (3)
Min. operating temperature	-25°C - (4)
Max. operating temperature	+60°C - (1)
Bending resistance	Pliable - (2)
Insulation resistance	>100MΩ
Glow Wire Test (IEC EN 60695-2)	960°C (IMQ)
Certifications	
Standard	EN 61386.1, EN 61386.22, IK: EN 62262

Conduit properties

Fire resistance: non-flame
propagating

EN 61386.1, EN 61386.22

Compliant with Low Voltage
Directive

LVD 2014/35/EU

Pre-lubricated

✓

Packed with 100% recyclable PE
film

✓

