
20 MM PVC LIGHT F 320N / R50

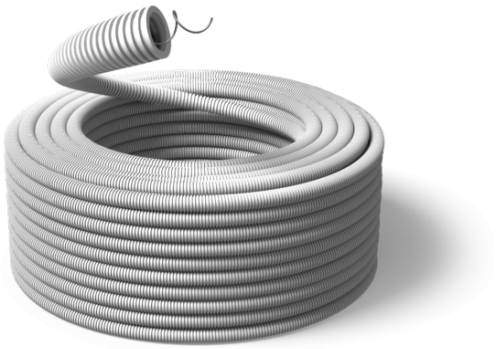

Light class. Made in PVC. Colour: grey (RAL 7035). With wire.

Art. code:	IPS20F
Classification	22212
Conduit colour	Grey - RAL 7035
External diameter	20 mm
Internal diameter	14,1 mm
Coil	50 m
Pallet	4200 m

Technical information

Environmental certificate

Environmental Product Declaration EPD®

Applications

Outdoor	No
Indoor	Yes
Exposed Installation	No
Liquid screed and concrete	No
Chased wall - Plasterboard	Yes*
Chased floor	No
False ceiling - Movable wall	Yes*
Prefab - Wood panels	Yes*
-	**Only for electrical installations that do not require HF/LSF0H conducts systems*

Conduit technical specification

Material	PVC
Compression resistance	320N (23°C, +/-2°C) - Light - (2)
Resistance to impact	1J - Light - (2)
Min. operating temperature	-5°C - (2)
Max. operating temperature	+60°C - (1)
Bending resistance	Pieghevole - Autorinvenente - (2)
Insulation resistance	>100MΩ
Glow Wire Test (IEC EN 60695-2)	960°C
Certifications	CE ÖVE VDE
Standard	EN 61386.1, EN 61386.22, IK: EN 62262

Conduit properties	
Fire resistance: non-flame propagating	EN 61386.1, EN 61386.22
Conforme alla Direttiva Bassa Tensione	LVD 2014/35/EU
Packed with 100% recyclable PE film	✓