


25 MM PVC LIGHT 320N / R50

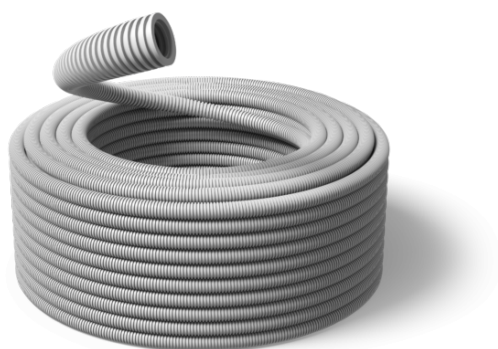

Light class. Made in PVC. Colour: grey (RAL 7035).

Art. code:	IPS25
Classification	22212
Conduit colour	Grey - RAL 7035
External diameter	25 mm
Internal diameter	18,2 mm
Coil	50 m
Pallet	2800 m

Technical information

Environmental certificate

Environmental Product Declaration 

Applications

Outdoor	No
Indoor	Yes
Exposed Installation	No
Liquid screed and concrete	No
Chased wall - Plasterboard	Yes*
Chased floor	No
False ceiling - Movable wall	Yes*
Prefab - Wood panels	Yes*

-

**Only for electrical installations that do not require
HF/LSFOH conducts systems*

Conduit technical specification

Material	PVC
Compression resistance	320N (23°C, +/-2°C) - Light - (2)
Resistance to impact	1J - Light - (2)
Min. operating temperature	-5°C - (2)
Max. operating temperature	+60°C - (1)
Bending resistance	Pliable - Self-recovering - (2)
Insulation resistance	>100MΩ
Glow Wire Test (IEC EN 60695-2)	960°C
Certifications	  
Standard	EN 61386.1, EN 61386.22, IK: EN 62262

Conduit properties

Fire resistance: non-flame
propagating

EN 61386.1, EN 61386.22

Compliant with Low Voltage
Directive

LVD 2014/35/EU

Packed with 100% recyclable PE
film

✓

