


25 MM PVC LIGHT F 320N / R50

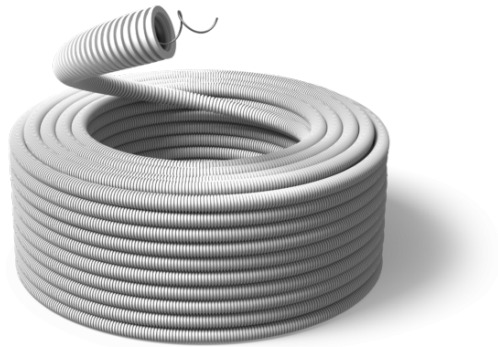

Light class. Made in PVC. Colour: grey (RAL 7035). With wire.

Art. code:	IPS25F
xSpeed PVC LIGHT	25 mm
Classification	22212
Conduit colour	Grey - RAL 7035
External diameter	25 mm
Internal diameter	18,2 mm
Coil	50 m
Pallet	2800 m


Technical information

Applications

Outdoor	No
Indoor	Yes
Exposed Installation	No
Liquid screed and concrete	No
Chased wall - Plasterboard	Yes*
Chased floor	No
False ceiling - Movable wall	Yes*
Prefab - Wood panels	Yes*

**Only for electrical installations that do not require HF/LSFOH conducts systems*

Conduit technical specification

Material	PVC
Compression resistance	320N (23°C, +/-2°C) - Light
Resistance to impact	1J - Light
Min. operating temperature	-5°C
Max. operating temperature	+60°C
Bending resistance	Pliable - Self-recovering
Insulation resistance	>100MΩ
Glow Wire Test (IEC EN 60695-2)	960°C
Certifications	
Standard	EN 61386.1, EN 61386.22, IK: EN 62262

Conduit properties

Fire resistance: non-flame propagating	EN 61386.1, EN 61386.22
--	-------------------------

Conduit properties

Compliant with Low Voltage

LVD 2014/35/EU

Directive

Packed with 100% recyclable PE

film



