


32 MM PVC LIGHT 320N / R25

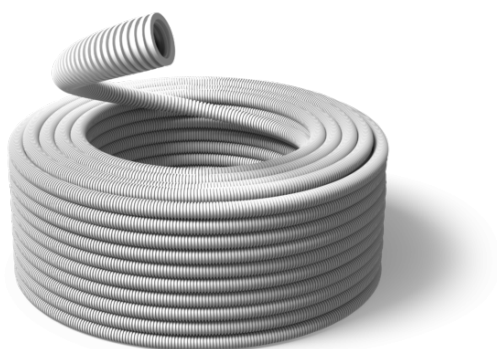

Light class. Made in PVC. Colour: grey (RAL 7035).

Art. code:	IPS32
Classification	22212
Conduit colour	Grey - RAL 7035
External diameter	32 mm
Internal diameter	24,2 mm
Coil	25 m
Pallet	1800 m
xSpeed PVC LIGHT	32 mm

Technical information

Applications

Outdoor	No
Indoor	Yes
Exposed Installation	No
Liquid screed and concrete	No
Chased wall - Plasterboard	Yes*
Chased floor	No
False ceiling - Movable wall	Yes*
Prefab - Wood panels	Yes*
-	<i>*Only for electrical installations that do not require HF/LSFOH conducts systems</i>

Conduit technical specification

Material	PVC
Compression resistance	320N (23°C, +/-2°C) - Light
Resistance to impact	1J - Light
Min. operating temperature	-5°C
Max. operating temperature	+60°C
Bending resistance	Pliable - Self-recovering
Insulation resistance	>100MΩ
Glow Wire Test (IEC EN 60695-2)	960°C
Certifications	  
Standard	EN 61386.1, EN 61386.22, IK: EN 62262

Conduit properties

Fire resistance: non-flame propagating	EN 61386.1, EN 61386.22
--	-------------------------

Conduit properties

Compliant with Low Voltage

LVD 2014/35/EU

Directive

Packed with 100% recyclable PE

film



Related products



40mm xSpeed HF UV R25

Art. code: ICTANUV4025RT20



63 mm Speed 750N / R25

Art. code: ICTA63



32 mm Speed F 750N / R50

Art. code: ICTA32F



25 mm Speed 750N / R100

Art. code: ICTA25



16 mm Speed 750N / R100

Art. code: ICTA16



25mm xSpeed HF UV R100

Art. code: ICTANUV25RT12