
# 32 MM PVC WT F 750N / R100

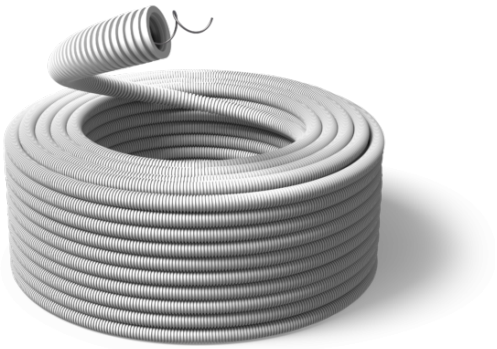

The PVC conduit with wire is ideal in standard installations that do not require the use of LSF0H materials; it is not suitable with liquid concrete and reinforced concrete. The conduit is made with ecological PVC and it is also internally lubricated. The colour of the conduit is white pearl (RAL 1013).

| | |
|---|---|
| **Art. code:** | IPCX32F |
| **Classification** | 33212 |
| **Conduit colour** | White - RAL 1013 |
| **External diameter** | 32 mm |
| **Internal diameter** | 24,2 mm |
| **Coil** | 25 m |
| **Pallet** | 900 m |

# Technical information

**Environmental certificate**

| | |
|---|---|
| Environmental Product Declaration | EPD® |

**Applications**

| | |
|---|---|
| Outdoor | No |
| Indoor | Yes |
| Exposed Installation | No |
| Liquid screed and concrete | No |
| Chased wall - Plasterboard | Yes* |
| Chased floor | Yes* |
| False ceiling - Movable wall | Yes* |
| Prefab - Wood panels | Yes* |
| - | **Only for electrical installations that do not require HF/LSF0H conducts systems* |

**Conduit technical specification**

| | |
|---|---|
| Material | PVC |
| Compression resistance | 750N (23°C, +/- 2°C) - Medium - (3) |
| Resistance to impact | 2J (IK07) - Medium - (3) |
| Min. operating temperature | -5°C - (2) |
| Max. operating temperature | +60°C - (1) |
| Bending resistance | Pieghevole - Autorinvenente - (2) |
| Insulation resistance | >100MΩ |
| Glow Wire Test (IEC EN 60695-2) | 960°C |
| Certifications | |
| Standard | EN 61386.1, EN 61386.22, IK: EN 62262 |

| **Conduit properties** | |
|---|---|
| Fire resistance: non-flame propagating | EN 61386.1, EN 61386.22 |
| Conforme alla Direttiva Bassa Tensione | LVD 2014/35/EU |
| Packed with 100% recyclable PE film | ✓ |