


## COUPLING 34 MM

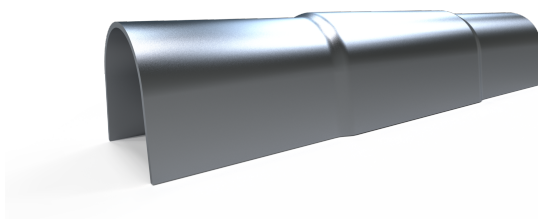

Robust connector with recessed design to ensure a smooth transition and seamless joints. Easily mounted using a Pmflex quick fastener positioned underneath the raised section. Surface-treated with Magnelis® and approved according to corrosion class C5 – ideal for Nordic climates and marine environments. Magnelis® also features a unique self-healing capability on drilled holes, weld seams and cut surfaces.

---

|                          |         |
|--------------------------|---------|
| <b>Art. code:</b>        | 0665090 |
| <b>Diameter</b>          | 34 mm   |
| <b>Quantity per pack</b> | 30 pcs  |

## Technical information

---

**Technical information**

|                   |           |
|-------------------|-----------|
| Diameter          | 34 mm     |
| Length            | 120 mm    |
| Width             | 40 mm     |
| Height            | 34 mm     |
| Weight            | 70 g      |
| Material          | Magnelis® |
| Corrosion class   | C5        |
| Quantity per pack | 30 pcs    |

