

COUPLING WITH CLIP 25 MM



Couplings for the connection of pliable conduits. Coloured and transparent : different colour for each diameter and transparency for an easy control of the conduits junction.
Eco-friendly: Low Smoke Flame retardant Zero Halogen.

Art. code:	SML25
Colour	Orange - Transparent
Diameter	25 mm
Mini pack	25 pcs
Maxi pack	300 pcs
Compliant with Low Voltage Directive	LVD 2014/35/EU
Flex	Coupling with clip

Technical information

Technical specification


Material	Polypropylene
Resistance to the penetration of solid objects	Dust-tight (6)
Resistance to water penetration	Protected against water jets (5)
IP protection rating	IP65
Fire resistance: non-flame propagating	■
LS - Low Smoke	IEC 61034-2
OH - Zero Halogen	IEC 60754-1& IEC 60754-2
Standard	EN 61386.1, EN 61386.22
Glow Wire Test (IEC EN 60695-2)	750°C
Certifications	  

Related products



Cable drawer MON3 5 m

Art. code: MON35

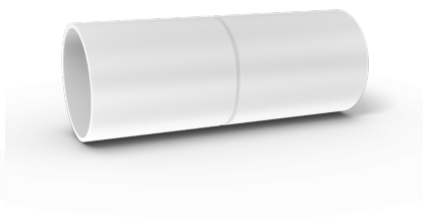

HF Coupling 20 mm

Art. code: MFL20



Coupling with clip 16 mm

Art. code: SML16



GoEasy

Art. code: PMEASY



Cable drawer MON 20 m

Art. code: MON20



GoEasy Plus

Art. code: PMEASYPLUS