

HF COUPLING 16 MM








IP44 Couplings for the connection of pliable conduits. They are Halogen Free according to European Standard EN 50642 and they are made of ecological polypropylene. The colour is transparent.

Art. code:	MFL16
Colour	Transparent
Diameter	16 mm
Mini pack	100 pcs
Maxi pack	2000 pcs
Compliant with Low Voltage Directive	LVD 2014/35/EU
Flex	HF Coupling

Technical information

Technical specification


Material	Polypropylene
Resistance to the penetration of solid objects	Protected against the ingress of solid objects with a diameter = / > 1.0 mm (4)
Resistance to water penetration	Protected against water splashes (4)
IP protection rating	IP44
Fire resistance: non-flame propagating	■
HF - Halogen Free	EN 50642
Standard	EN 61386.1, EN 61386.22
Glow Wire Test (IEC EN 60695-2)	960°C
Certifications	    

Related products



Cable drawer MON3 5 m

Art. code: MON35

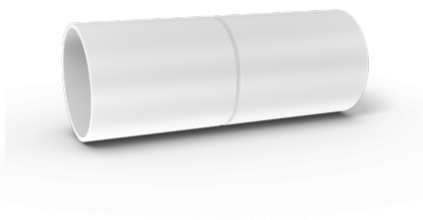


HF Coupling 20 mm

Art. code: MFL20



Cable puller STCX 20 m

Art. code: STCX20

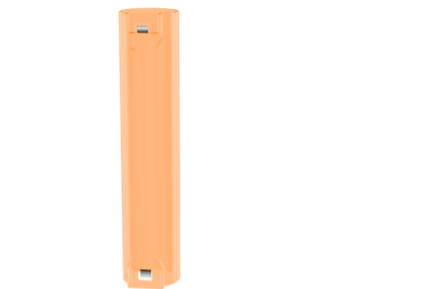

Coupling with clip 25 mm

Art. code: SML25



Cable drawer MON 20 m

Art. code: MON20



Cable puller STCX 15 m

Art. code: STCX15