

HF COUPLING 20 MM








IP44 Couplings for the connection of pliable conduits. They are Halogen Free according to European Standard EN 50642 and they are made of ecological polypropylene. The colour is transparent.

| | |
|---|----------------|
| Art. code: | MFL20 |
| Colour | Transparent |
| Diameter | 20 mm |
| Mini pack | 100 pcs |
| Maxi pack | 1200 pcs |
| Compliant with Low Voltage Directive | LVD 2014/35/EU |
| Flex | HF Coupling |

Technical information

Technical specification

| | |
|--|---|
| Material | Polypropylene |
| Resistance to the penetration of solid objects | Protected against the ingress of solid objects with a diameter = / > 1.0 mm (4) |
| Resistance to water penetration | Protected against water splashes (4) |
| IP protection rating | IP44 |
| Fire resistance: non-flame propagating | ■ |
| HF - Halogen Free | EN 50642 |
| Standard | EN 61386.1, EN 61386.22 |
| Glow Wire Test (IEC EN 60695-2) | 960°C |
| Certifications |      |

Related products



Coupling with clip 16 mm

Art. code: SML16




Cable drawer MON3 20 m

Art. code: MON320



Coupling with clip 40 mm

Art. code: SML40

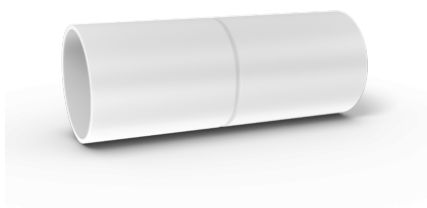

HF Coupling 50 mm

Art. code: MFL50



GoEasy

Art. code: PMEASY



Cable puller STCX 10 m

Art. code: STCX10