


INSPECTABLE COUPLING 16 MM



IP50 inspectable couplings “open&close” for the connection of pliable conduits, also useful for protecting slightly damaged conduits. They are ecological (Low Smoke Flame retardant Zero Halogen) and their colour is grey (RAL 7035).

Art. code:	MCR16
Flex	Inspectable coupling
Colour	Grey - RAL 7035
Diameter	16 mm
Mini pack	50 pcs
Maxi pack	800 pcs

Technical information

Technical specification

Material	Polypropylene
Resistance to the penetration of solid objects	Dust protected (5)
Resistance to water penetration	No protection (0)
IP protection rating	IP50
Fire resistance: non-flame propagating	■
LS - Low Smoke	IEC 61034-2
OH - Zero Halogen	IEC 60754-1; IEC 60754-2
Standard	EN 61386.1, EN 61386.22
Glow Wire Test (IEC EN 60695-2)	960°C
Compliant with Low Voltage Directive	LVD 2014/35/EU
Certifications	

Related products



HF Coupling 32 mm

Art. code: MFL32




Cable puller STCX 10 m

Art. code: STCX10



HF Coupling 50 mm

Art. code: MFL50

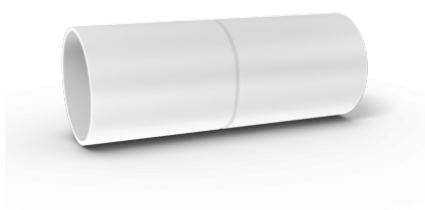

HF Coupling 25 mm

Art. code: MFL25



GoEasy Plus

Art. code: PMEASYPLUS



Cable drawer MON3 15 m

Art. code: MON315